




Easy to use

Support screen control through remote/mobile devices , giving superior interactive experience. Integrated system allows local apps installation, such as wireless screensharing and mobile screen control app.

Easy operation | HMI

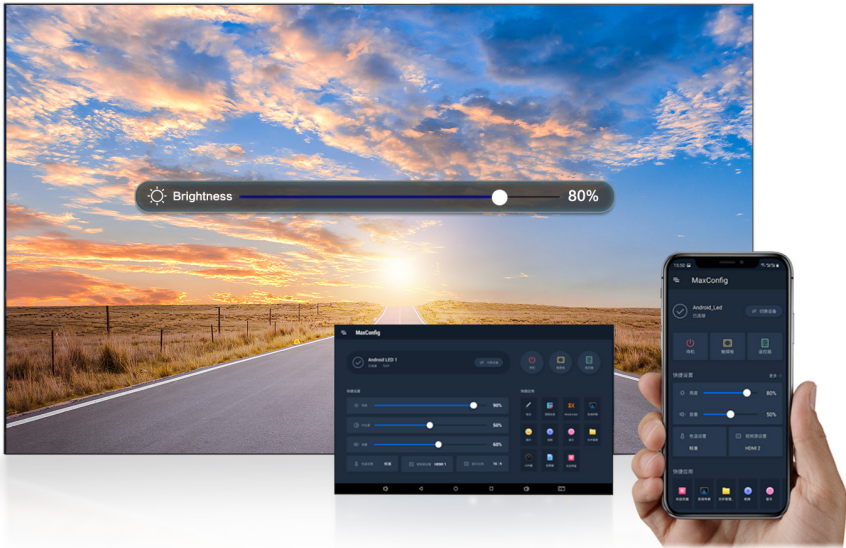

Product Parameters			
Product Model	DA1918	DA1920	DA1925
Pixel (mm)	1.8	2.0	2.5
Cabinet Resolution (dots)	171×192	160×180	128×144
Maximum Power Consumption (W/m²)	295	286	295
Brightness (nits)	500	500	600
Cabinet Size (W×H×D) (mm)	320×360×39		
Cabinet Weight (kg)	1.16		
Contrast	6500:1		
Viewing Angle (H/V°)	170 ° /H, 170 ° /V		
LEDs Life Time	≥100000h		
Maintenance Mode	Front		

*All the data are from CVTE lab. The data above are subject to change without prior notice.



CVTE | QSTECH Co., Ltd.
📍 : No.6, 4th Yunpu Road, Huangpu District, Guangzhou, P.R.China
Wenxuan 3rd Road, Wangsi Street, Fengdong New Town, Xi'an City, Shaanxi Province, China
🌐 : www.qs-tech.com
✉ : marketing@qs-tech.com



H19 PRO Series

The future of oneness has arrived



A CVTE COMPANY



Whole Cabinet Delivery

Pre-installed all-in-one cabinet, no need for on-site components assembly. Factory original cables and parts with guaranteed quality. 8:9 display ratio, achieve 16:9 standard ratio with ease. Whole cabinet only weighs 1.1kg.


Components pre-installed | **Original parts** | **8:9 display ratio**



Handy Installation

1.1kg lightweight cabinet, which can be installed using magnet, support full-frontal service with air suction tool. 45°corner cut allows 90°splicing. Increase installation efficiency while lower overall operation cost.


Thin & light | **Full-frontal service** | **90°splicing**

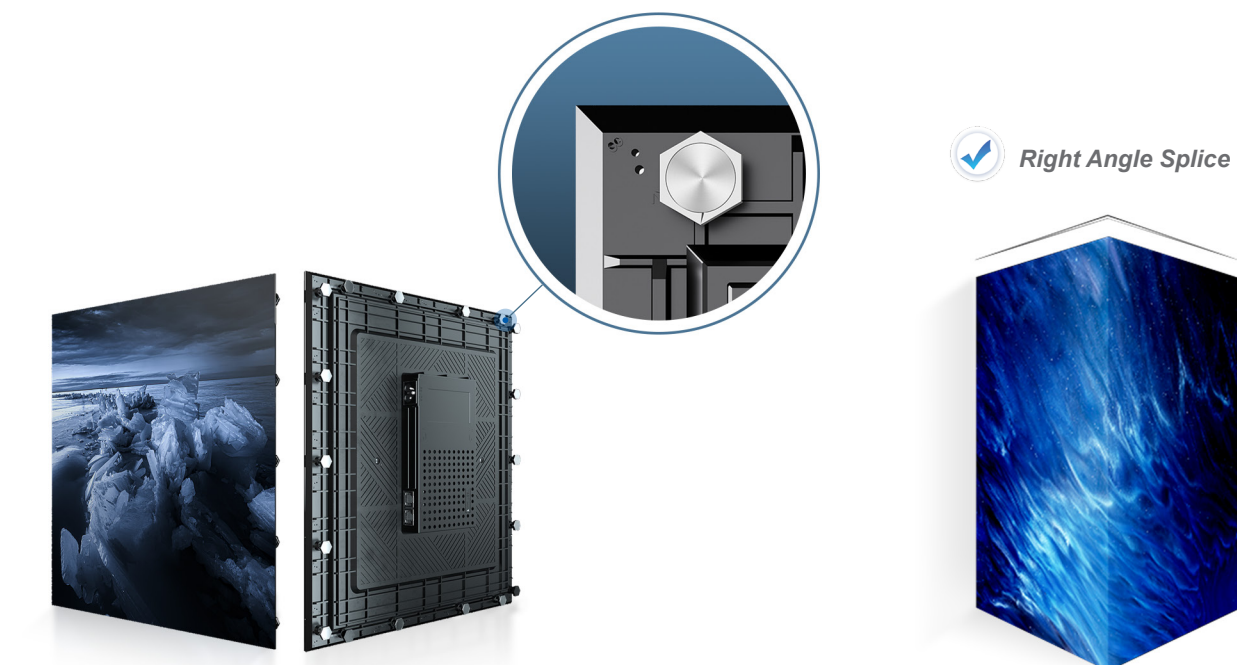

Highly Integration

Power supply, receiving card and hub board all integrated into 1 boardm with no extra components, which can reduce connecting wires, increase stability and make maintenance easier.

Easy to service | **More reliable** | **Hot-swapping**

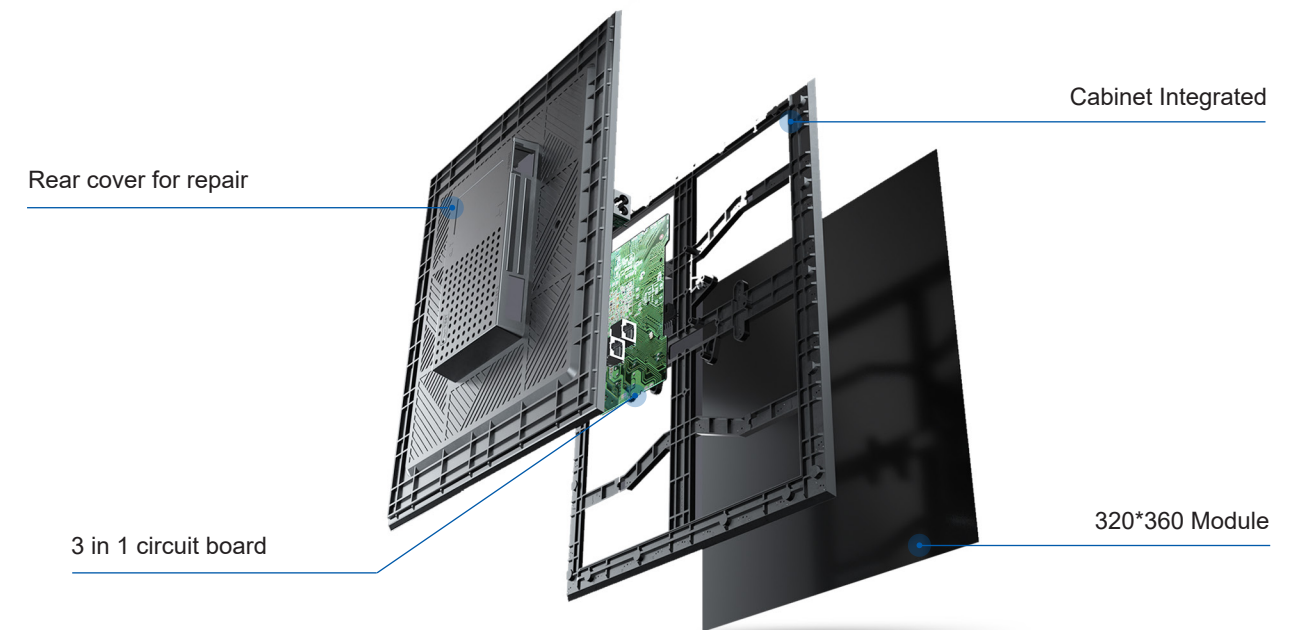

Environmental-friendly

Smart power supply allows Self-adaptive voltage distribution adjustment, and support constant dynamic output. Voltage will be stabilized at saturation point, which better reduce power-consumption. The cabinets are also RoHS compliant.

V-0 Flame retardant | **RoHS compliant**

- | | |
|--|--|
| ■ H19 PRO 500cd/m ²
maximum power consumption
295w/m² | ■ Common cathode products 500cd/m ²
maximum power consumption
440w/m² |
|--|--|

